


Spécifications



La photo est représentative

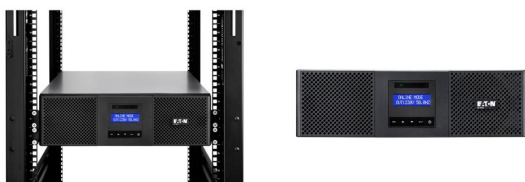

Eaton 9E6KIR

Eaton 9E UPS, 6000 VA, 5400 W, Input: Hardwired, Outputs: Hardwired, (8) C13, (2) C19, Rack, 3U, Rack-mounting kit included

Spécifications générales

PRODUCT NAME	Eaton 9E UPS
CATALOG NUMBER	9E6KIR
EAN	3553340710858
PRODUCT LENGTH/DEPTH	686 mm
PRODUCT HEIGHT	130 mm
PRODUCT WIDTH	440 mm
PRODUCT WEIGHT	45.15 kg
WARRANTY	2 year
COMPLIANCES	LVD Directive (CB) EMC Directive RoHS Directive REACH WEEE Directive Packaging Directive Batteries Directive
CERTIFICATIONS	IEC/EN 62040-1 IEC/EN 62040-2 IEC/EN 62040-3 CE UKCA Cm Ukr
MODEL CODE	Eaton 9E 6000i Rack3U



Powering Business Worldwide

Spécifications du produit

TOPOLOGY	Online/Double-conversion
FORM FACTOR	Rack
RACK SIZE	3U
CONSTRUCTION TYPE	482.6 mm (19 inch) device
COLOR	Black
VA RATING	6000 VA
WATTAGE	5400 W
RACK MOUNTING KIT	Yes

PACKAGE CONTENTS	• UPS • (2) IEC-IEC output cables • USB cable • Rack-mounting kit (rails and brackets) • Safety instructions • Quickstart guide
-------------------------	---

INTERNAL BYPASS	Yes
HOT SWAP POWER	No
AUTO SHUTDOWN FUNCTION	Yes
PRIMARY FREQUENCY - MAX	70 Hz
PRIMARY FREQUENCY - MIN	40 Hz
INPUT CONNECTION	Hardwired/fixed connection
INPUT NOMINAL VOLTAGE	230V default (200/208/220/230/240V)
NOMINAL FREQUENCY	50/60 Hz
INPUT FREQUENCY RANGE	40-70 Hz
INPUT POWER FACTOR	>.99
RECEPTACLE	(8) C13, (2) C19, Hardwired
NUMBER OF OUTPUT CONNECTIONS FRENCH STANDARD (TYPE E)	0
NUMBER OF OUTPUTS 5-15R	0
NUMBER OF OUTPUTS 5-20R	0
NUMBER OF OUTPUTS 6-15R	0
NUMBER OF OUTPUTS 6-20R	0
NUMBER OF OUTPUTS L14-30R	0

Ressources

NUMBER OF OUTPUTS L5-20R	0
NUMBER OF OUTPUTS L5-30R	0
NUMBER OF OUTPUTS L6-20R	0
NUMBER OF OUTPUTS L6-30R	0
NUMBER OF OUTPUTS C13	8
NUMBER OF OUTPUTS C19	2
NUMBER OF OUTPUTS HARDWIRED	1
NUM OF OUTPUTS PC (SCHUKO)	0
OUTPUT WAVEFORM	Sine wave
OUTPUT NOMINAL VOLTAGE	230V default (200/208/220/230/240V)
FEED TYPE	1
VOLTAGE TYPE	AC
RUNTIME GRAPH	\$row.attributeValue.cdata
BATTERY MANAGEMENT	• Temperature compensated charging method • Automatic battery test • Deep discharge protection
BATTERY REPLACEMENT	Hot-swappable internal batteries and extended battery modules (EBMs)
BATTERY TYPE	Sealed, lead-acid
EXTENDED BATTERY CAPABILITY	Yes
RUNTIME AT HALF LOAD	8.5 min
COMMUNICATION	• USB port (HID compliant) • Serial port (RS232) • Mini-terminal block for remote power off
EXPANSION SLOTS	One slot for optional communication card
ETHERNET INTERFACE	No
SOFTWARE COMPATIBILITY	Eaton Intelligent Power Manager, Eaton Intelligent Power Protector

USER INTERFACE	Multilingual LCD display
TYPE OF INTERFACE	Other
POTENTIAL FREE SWITCH CONTACT	Yes
ALTITUDE	3000 m
BTU RATING	Online: 1105
NOISE LEVEL	<45 dB at 1 meter
RELATIVE HUMIDITY	0-95% non-condensing
TEMPERATURE RANGE	0° to 40°C (32° to 104°F)
INPUT VOLTAGE - MAX	276 V
INPUT VOLTAGE - MIN	100 V
OUTPUT VOLTAGE - MAX	240 V
OUTPUT VOLTAGE - MIN	200 V
SECONDARY FREQUENCY - MAX	60 Hz
SECONDARY FREQUENCY - MIN	50 Hz
BATTERY QUANTITY	15
EFFICIENCY AT MAX. LOAD	94
EFFICIENCY (ECO-MODE)	98
INPUT VOLTAGE RANGE	176-276 V (100-276 V with derating)
OUTPUT FREQUENCY	50/60 Hz
OUTPUT POWER FACTOR	0.9
OUTPUT VOLTAGE RANGE	200/208/220/230/240 V +/- 1%
PHASE (INPUT)	1
PHASE (OUTPUT)	1
RUNTIME AT FULL LOAD	3 min
VOLTAGE DISTORTION OUTPUT (LINEAR LOAD) - MAX	2
COMMUNICATION INTERFACE	RS232 USB
POWER CONSUMPTION	324 W

NOM DU PROJET:

NUMÉRO DU PROJET:

PRÉPARÉ PAR:

DATE:



Eaton Corporation plc Eaton House
30 Pembroke Road
Dublin 4, Irlande
Eaton.com

© 2025 Eaton. Tous droits réservés.

Suivez-nous sur les réseaux sociaux
pour connaître les dernières
informations concernant nos
produits.

