
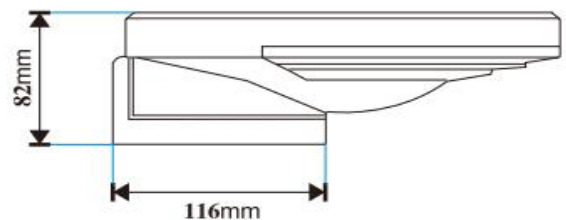
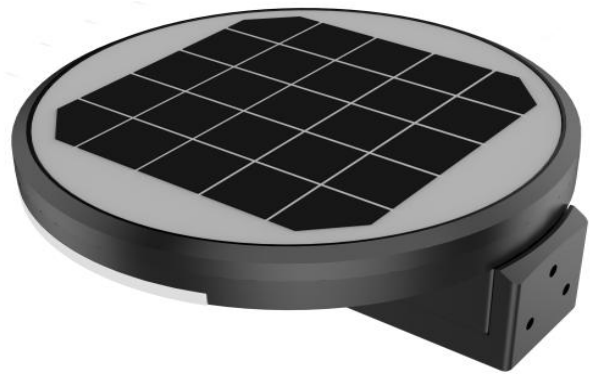


Stylux

Datasheet

Product Name:	Solar Led Wall Light
Model NO.:	STSRL3N28D
Lumen Output:	360lm
CCT:	4000K
CRI:	>80
Solar Panel Information:	Monocrystalline 5V 4.5W
Battery Type:	LiFePO4
Battery Capacity:	3.2V 6.4AH
LED Wattage:	4.5W
Charging Time:	5hrs
Discharging Time:	12hrs
Operating Mode:	100% brightness in the 1st hour, 80% brightness in the 2nd hour, 60% brightness in the 3rd and 4th hour, 40% brightness in the next 3 hours and 30% brightness in the last 5 hours.
Ambient temperature:	-20°C~+55°C
Protection class:	IP65
Electrical insulation grade:	Class III

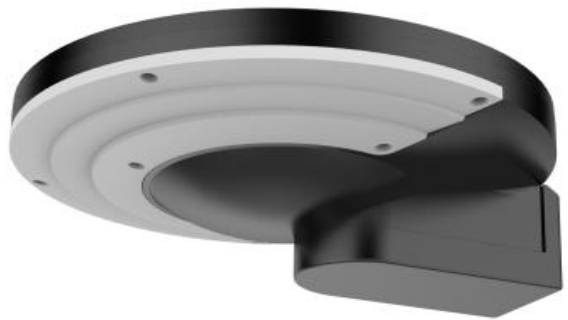

Stylux

Diameter:	235mm
Height:	82mm
Warranty:	2 Years
Materials:	Die-cast Aluminum +PC
Finish:	Sand Black
Packing:	1pc per inner brown box with color sticker, 12pcs per master carton
Master Carton Size:	52x50x38CM
Gross Weight:	18.04kg

